



Super Runner Value Gas Fryers

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

Super Runner Value Gas Fryers

Models

SR42G

SR52G

SR62G



SR62G
Shown with optional casters.

Standard Features

- Tube-type frypot design
- Oil capacity
 - SR42G -- 43 lb. (21 liter)
 - SR52G -- 50 lb. (25 liter)
 - SR62G -- 75-lb. (37 liter)
- Btu/hr. input
 - SR42G -- 105,000 (26,481 kcal) (30.8 kw) (3-tube)
 - SR52G -- 120,000 (30,600 kcal) (35.2 kw) (4-tube)
 - SR62G -- 150,000 (37,783 kcal) (44 kw) (5-tube)
- Millivolt control system - requires no electrical hookup
- Durable temperature probe
- Frying area
 - SR42G 14" x 14" (35 x 35 cm)
 - SR52G 14" x 14" (35 x 35 cm)
 - SR62G 18" x 18" (46 x 46 cm)

- Thermo-tube design
- Wide cold zone
- Drain valve
 - SR42G -- 1" (2.5 cm)
 - SR52G & SR62G -- 1-1/4" (3.2 cm)
- Stainless steel frypot, front, door, and backsplash/flue cover, aluminized sides
- Wire form basket hanger and two fry baskets
- 6" (15 cm) steel legs with 1" adjustment

Options Accessories

- Piezo ignitor
- Frypot covers
- Casters

See Dean domestic price list for other available options and accessories.

Specifications

Designed to economically meet basic frying needs

Fry a wide variety of products with Dean's Super Runner fryers which easily accommodate items from French fries to main entree menu selections. The fryers are available in three oil capacities utilizing 43 lbs., 50 lbs. and 75 lbs. of oil.

Make the most of your energy dollars with Dean's exclusive Thermo-Tube design. The heating tubes provide a large oil contact surface. Flow-tube baffles control the transfer of heat into the oil. Dean's wide cold

zone frypot protects oil integrity by trapping debris under the cooking area, preventing carbonization of particles and wasteful oil deterioration.

Dean's durable temperature probe assures prompt recovery which reduces time lost between loads and requires no electrical hookup.

Dean's Super Runner gas fryers achieve dependability through simplicity of design, durable stainless steel baffles and rugged cast iron burners.




5489 Campus Drive
Shreveport, LA 71129
USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@dean.enodis.com

<http://dean.enodis.com>
Bulletin No. 830-0117
Printed 10/08
Revised 9/12/11
Litho in U.S.A. ©Frymaster



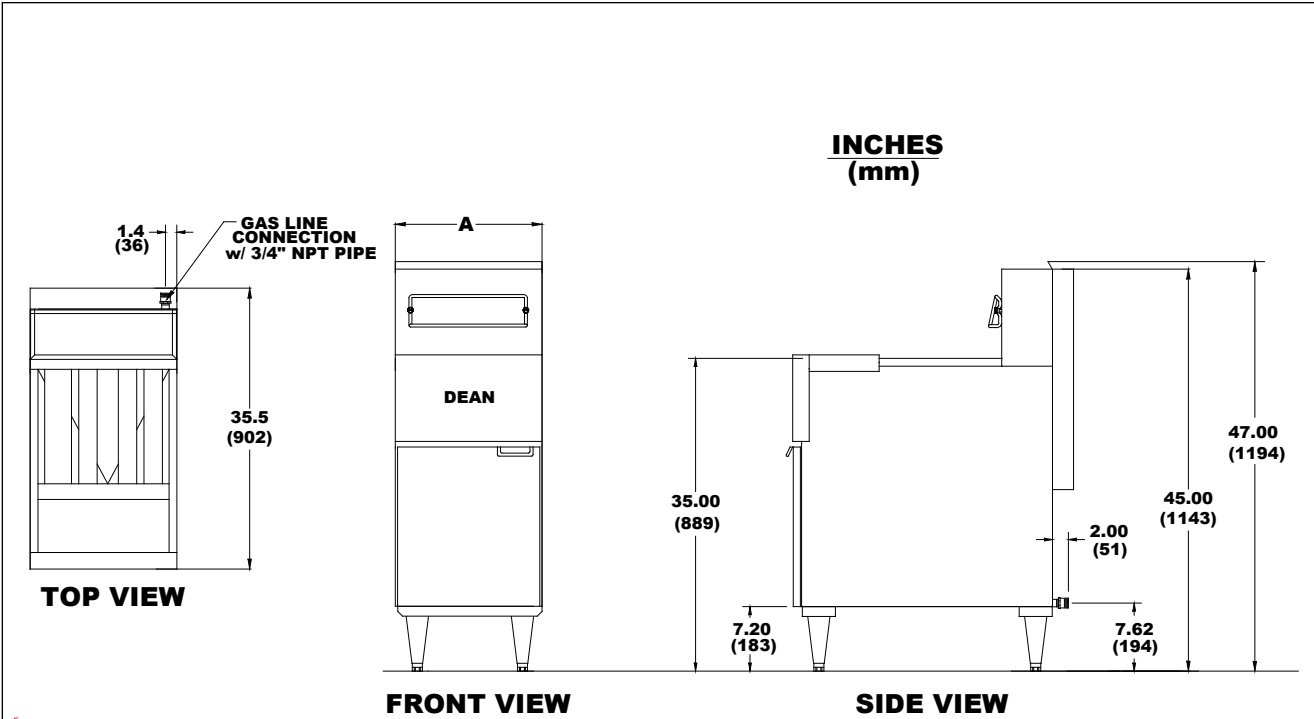

| MODEL | OIL CAPACITY | OVERALL SIZE (cm) | | | DRAIN HEIGHT (cm) | NO. OF TUBES | NET WEIGHT | APPROXIMATE SHIPPING DIMENSIONS | | | | | |
|-------|--------------------|-------------------|----------------|----------------|-------------------|--------------|------------------|---------------------------------|-------|---------|-----------------|----------------|------------|
| | | HEIGHT | WIDTH (A) | LENGTH | | | | WEIGHT | CLASS | CU. FT. | DIMENSIONS (cm) | | |
| | | | | | | | | | | | H | W | L |
| SR42G | 43 lbs. (32 liter) | 45" (114.3) | 15-1/2" (39.4) | 29-1/4" (74.3) | 18-3/8" (46.7) | 3 | 111 lbs. (50 kg) | 150 lbs. (68 kg) | 85 | 22 | 48-1/2" (123.2) | 20-1/2" (52.1) | 36" (91.4) |
| SR52G | 50 lbs. (25 liter) | 45" (114.3) | 15-1/2" (39.4) | 29-1/4" (74.3) | 17-1/2" (44.5) | 4 | 121 lbs. (55 kg) | 180 lbs. (82 kg) | 85 | 22 | 48-1/2" (123.2) | 20-1/2" (52.1) | 36" (91.4) |
| SR62G | 75 lbs. (42 liter) | 45" (114.3) | 20" (50.8) | 35-1/2" (90.2) | 19-3/4" (50.2) | 5 | 176 lbs. (80 kg) | 255 lbs. (116 kg) | 85 | 22 | 48-1/2" (123.2) | 20-1/2" (52.1) | 36" (91.4) |

POWER REQUIREMENTS

| MODEL | DOMESTIC NATURAL OR LP GAS INPUT RATING | CE NATURAL OR LP GAS INPUT RATING | GAS CONNECTION | ELECTRICAL REQUIREMENT |
|-------|---|--|--|------------------------|
| SR42G | 105,000 Btu/hr. (26,481 kcal/hr.) (30.8 kw/hr.) | 76,792 Btu/hr. (19,343 kcal/hr.) (22.5 kw/hr.) | 3/4" N.P.T. Regulator not required for manifold pressure. See note below.* | NONE |
| SR52G | 120,000 Btu/hr. (30,600 kcal/hr.) (35 kw/hr.) | 102,390 Btu/hr. (25,790 kcal/hr.) (30 kw/hr.) | | |
| SR62G | 150,000 Btu/hr. (37,783 kcal/hr.) (44 kw/hr.) | 102,390 Btu/hr. (25,790 kcal/hr.) (30 kw/hr.) | | |

HOW TO SPECIFY

The following description will assist with ordering the features desired for this equipment:

- SR42 43 lb. value, tube-type gas fryer with millivolt control system and durable temperature probe
- SR52 50-lb. value, tube-type gas fryer with millivolt control system and durable temperature probe
- SR62 75-lb. value, tube-type gas fryer with millivolt control system and durable temperature probe

NOTE:

DO NOT CURB MOUNT.
 *SUPPLY PRESSURE: DO NOT EXCEED 14" W.C. or 1/2 PSI.
 Please specify:
 Natural or propane gas
 Altitude -- if above 2000 ft. (610 m)

Model # _____
CSI Section 11400